

### GENERAL FEATURES

- **Long Service Life** - Thick plate design and efficient gas recombination yield a service life expectancy of up to 10 years in standby mode.
- **Low Internal Resistance** - Superb high-rate discharge characteristics ensure reliable performance in UPS and Telecom applications.
- **Maintenance-Free, Non-Spillable** - Proven VRLA technology guarantees safe operation without maintenance and 'non-restricted article' status for transportation.
- **Low Self-Discharge** - Lead-calcium alloy grids and use of high purity lead account for superior shelf-life characteristics permitting storage for extended periods of time.
- **Designed-In Reliability** - Cutting-edge manufacturing and process control combined with meticulous quality assurance procedures guarantee consistent and dependable performance



### PERFORMANCE SPECIFICATIONS

<b>Nominal Voltage</b>	6V(3 cells)	
<b>Design Floating Life @25°C</b>	12 Years	
<b>Nominal Capacity @25°C</b>	20 hour rate 0.60A to 5.4V	12.0Ah
	10 hour rate 1.127A to 5.4V	11.27Ah
	5 hour rate 2.147A to 5.1V	10.735Ah
	3 hour rate 3.239A to 4.95V	9.717Ah
	1 hour rate 7.654A to 4.80V	7.654Ah
<b>Internal Resistance</b>	Full Charged Battery@25°C	<10mΩ
<b>Energy Density (20-hr. rate)</b>	96.97W-h/l	
<b>Specific Energy (20-hr. rate)</b>	43.38W-h/kg	
<b>Shelf Life (nominal capacity at 20°C)</b>	1 Month	97%
	3 Months	91%
	6 Months	83%
<b>Standby Use Charge (Constant Voltage) @25°C</b>	Initial Charging Current Less than 3.6A Voltage 6.85 - 6.95V	
	<b>Cycle Use Charge (Constant Voltage) @25°C</b>	
<b>Operating Temperature Range</b>	Charge	0°C to 50°C
	Discharge	-20°C to 60°C


### GENERAL FEATURES mm

Unit: mm


Length	150±1	Total Height	99±1
Width	50±1	Weight(kg)	1.66±3%
Height	93±1		





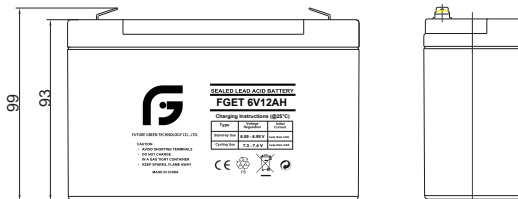



### TERMINALS mm



F1 Terminal



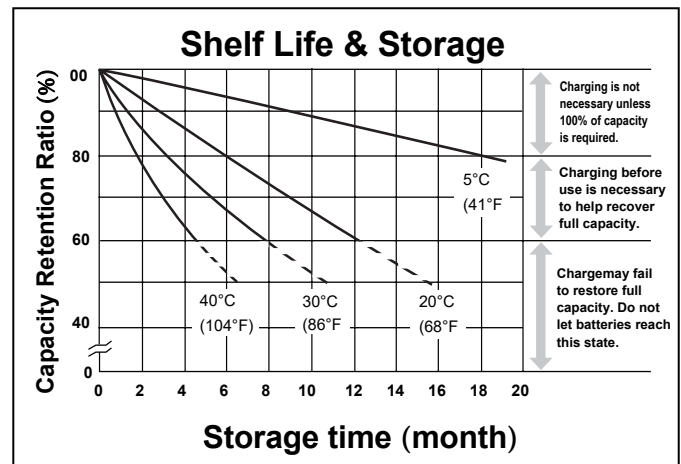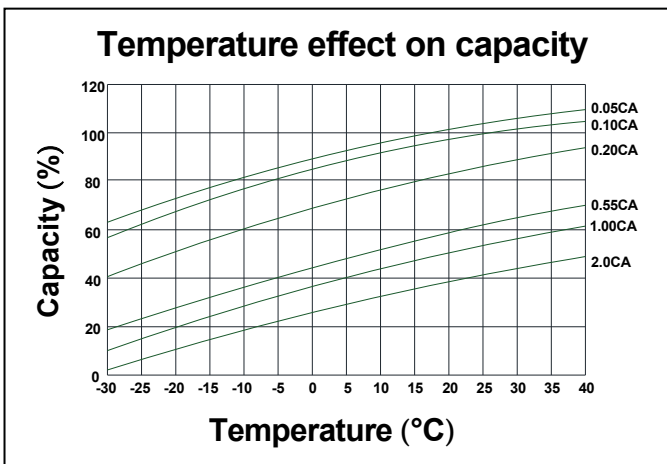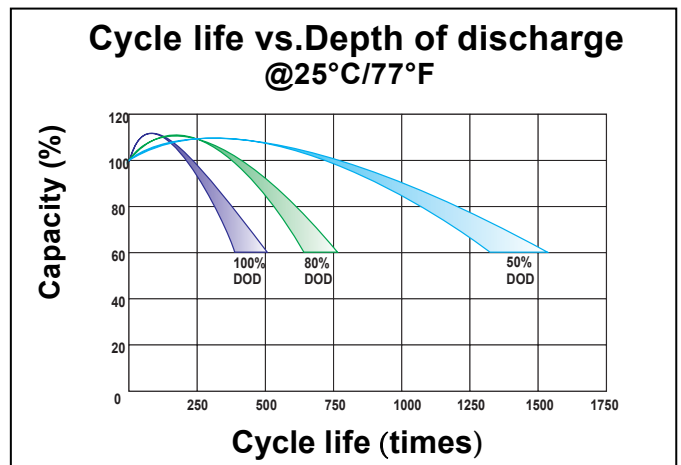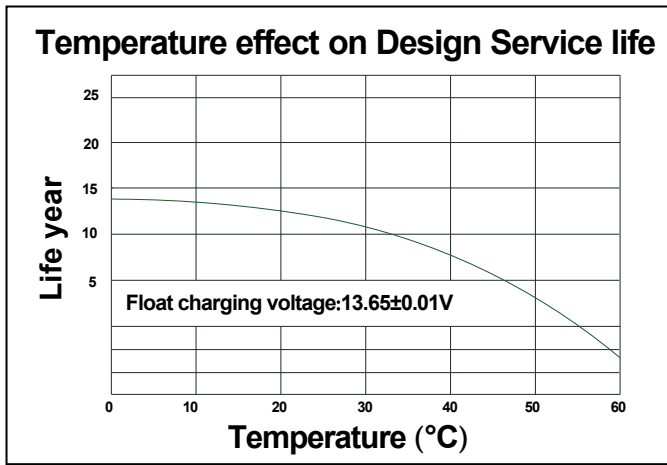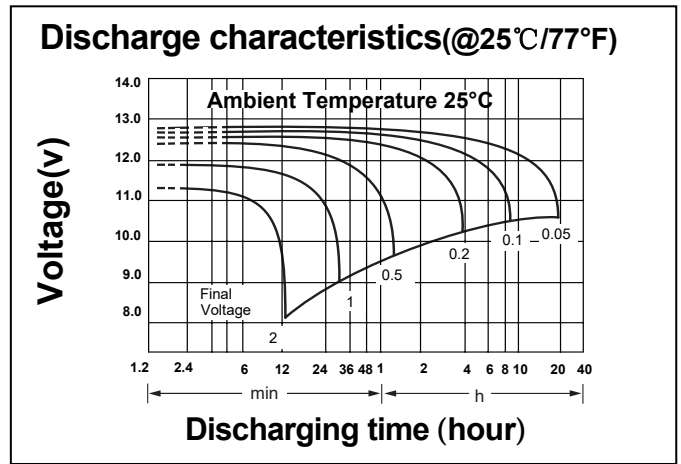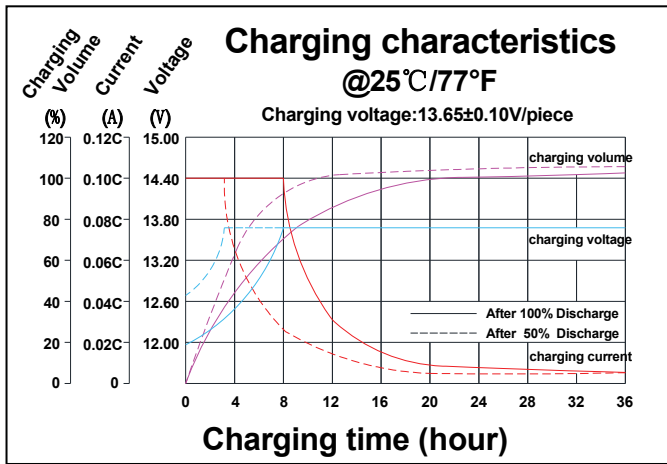

**CONSTANT CURRENT DISCHARGE RATINGS (Amperes at 25°C)**

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
1.60V	46.15	30.41	22.66	13.11	7.654	4.516	3.283	2.614	2.207	1.475	1.201	0.625
1.65V	44.48	29.50	22.07	12.83	7.513	4.450	3.239	2.582	2.181	1.460	1.190	0.620
1.70V	42.31	28.31	21.29	12.45	7.325	4.362	3.181	2.539	2.147	1.440	1.174	0.613
1.75V	39.53	26.77	20.27	11.95	7.078	4.246	3.104	2.481	2.102	1.414	1.154	0.604
1.80V	36.01	24.81	18.96	11.30	6.755	4.093	3.003	2.405	2.043	1.379	1.127	0.592