

HIGH PERFORMANCE MODULE

FGET-72 Cell-M

72 CELL
MONOCRYSTALLINE MODULE

340-375W
POWER OUTPUT RANGE


19.3%
MAXIMUM EFFICIENCY

0/+5W
POSITIVE POWER TOLERANCE

FGET 72 cell series of Mono crystalline and Poly crystalline two options for small roof systems. Even with limited space, the FG60 panels generate a lot of energy. As one of the most trusted panels in the industry, the FG72 cell module is popular with residential and commercial customers for its reliability, aesthetics and compatibility with all major system and module electronics. We are committed to building strategic, mutually beneficial collaboration with installers, developers, distributors and other partners.

Comprehensive Product And System Certificates

IEC61215/IEC61730/UL1703/IEC61701/IEC62716
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gas Emissions Verification
 OHSAS 18001: Occupational Health and Safety Management System

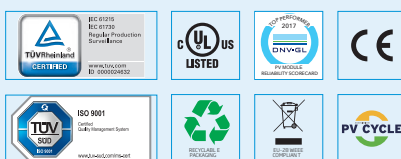

Ideal for large scale installations

- High power footprint reduces installation time & BOS costs



Excellent low light performance on cloudy days, mornings and evenings

- Advanced surface texturing
- Back surface field
- Selective emitter



Maximize Limited Space with high efficiency

- Up to 193 W/m² power density
- Low thermal coefficients for greater energy production at high operating temperatures



Highly reliable due to stringent quality control

- All modules have to pass electroluminescence (EL) inspection
- Over 30 in-house tests (UV, TC, HF, and many more)
- In-house testing goes well beyond certification requirements
- PID resistant
- 1000 V UL/1000 V IEC certified




Certified to withstand challenging environmental conditions


- 2400 Pa wind load
- 5400 Pa snow load
- 35 mm hail stones at 97 km/h
- Ammonia resistance
- Salt mist resistance
- Resistance to sand and dust abrasion

LINEAR PERFORMANCE WARRANTY


10 Year Product Warranty · 25 Year Linear Power Warranty

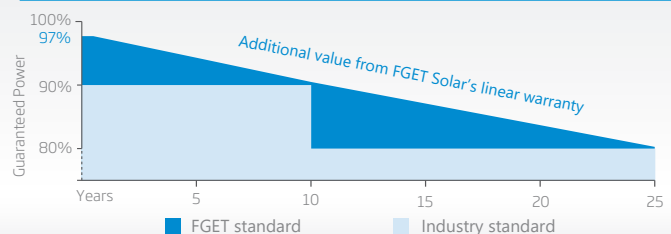

DIMENSIONS OF PV MODULE FGET-DD14A (II)
(unit: mm)

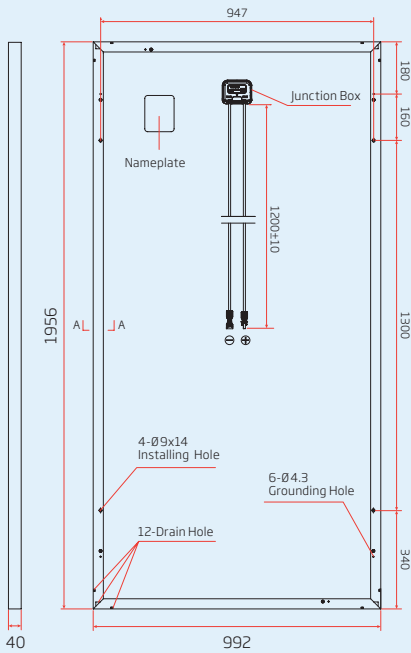


Back View




(A-A)

I-V CURVES OF PV MODULE (365W)

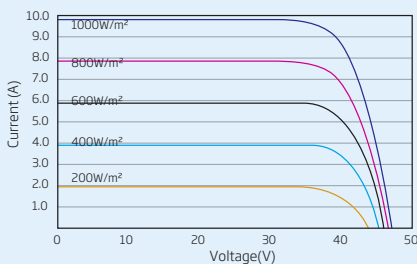

P-V CURVES OF PV MODULE (365W)

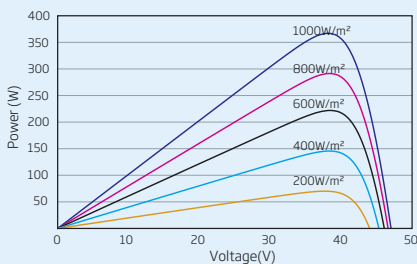

ELECTRICAL DATA @ STC	FGET-340	FGET-345	FGET-350	FGET-355	FGET-360	FGET-365	FGET-370	FGET-375
Peak Power Watts-P _{MAX} (Wp)*	340	345	350	355	360	365	370	375
Power Output Tolerance-P _{MAX} (W)	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5	0/+5
Maximum Power Voltage-V _{MPP} (V)	38.2	38.5	38.7	38.8	39.0	39.3	39.7	40.0
Maximum Power Current-I _{MPP} (A)	8.90	8.96	9.04	9.14	9.24	9.30	9.33	9.37
Open Circuit Voltage-V _{OC} (V)	46.2	46.7	47.0	47.4	47.7	48.0	48.3	48.5
Short Circuit Current-I _{SC} (A)	9.50	9.55	9.60	9.65	9.70	9.77	9.83	9.88
Module Efficiency η _m (%)	17.5	17.7	18.0	18.3	18.5	18.8	19.0	19.3

STC: Irradiance 1000 W/m², Cell Temperature 25 °C, Air Mass AM1.5
* Measuring tolerance: ±3%

ELECTRICAL DATA @ NOCT	FGET-340	FGET-345	FGET-350	FGET-355	FGET-360	FGET-365	FGET-370	FGET-375
Maximum Power-P _{MAX} (Wp)	253	257	261	264	268	272	276	279
Maximum Power Voltage-U _{MPP} (V)	35.4	35.7	35.9	36.0	36.2	36.4	36.8	37.1
Maximum Power Current-I _{MPP} (A)	7.15	7.20	7.26	7.34	7.42	7.47	7.50	7.53
Open Circuit Voltage-U _{OC} (V)	42.9	43.4	43.7	44.1	44.3	44.6	44.9	45.1
Short Circuit Current-I _{SC} (A)	7.67	7.71	7.75	7.79	7.83	7.89	7.94	7.98

NOCT: Irradiance at 800 W/m², Ambient Temperature 20 °C, Wind Speed 1 m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline 156.75 × 156.75 mm
Cell Orientation	72 cells (6 × 12)
Module Dimensions	1956 × 992 × 40 mm
Weight	26.0 kg with 4.0 mm glass; 22.5 kg with 3.2 mm glass
Glass	4.0 mm for PERC Mono; 3.2 mm for Std Mono, high transparency, AR coated and heat tempered solar glass
Backsheet	White
Frame	Silver Anodized Aluminium Alloy
J-Box	IP 67 or IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² , 1200 mm
Connector	EU Countries: 28 MC4 / UTX / TS4, Non-EU Countries: 28 QC4 / TS4

TEMPERATURE RATINGS

Nominal Operating Cell Temperature (NOCT)	44°C (±2K)
Temperature Coefficient of P _{MAX}	- 0.39%/K
Temperature Coefficient of V _{OC}	- 0.29%/K
Temperature Coefficient of I _{SC}	0.05%/K

MAXIMUM RATINGS

Operational Temperature	-40 to +85°C
Maximum System Voltage	1000VDC (IEC) 1000VDC (UL)
Max Series Fuse Rating*	15 A (Power ≤ 350 W) 20 A (Power ≥ 355 W)
Mechanical Load	5400 Pa
Wind Load	2400 Pa


*DO NOT connect fuse in combiner box with two or more strings in parallel connection

WARRANTY

10 year Product Workmanship Warranty
25 year Linear Performance Warranty
(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box:	27 pieces
Modules per 40' container:	648 pieces



FGET_EN_2017_B